


**SITE PREPARATION:**

SUBSOIL BELOW TREE PIT SHALL BE SCARIFIED TO A DEPTH OF 300mm TO REDUCE COMPACTION AND SHALL BE MIXED WITH TOPSOIL MATERIAL TO IMPROVE DRAINAGE AND INCREASE ROOT ZONE AREA.

**PLANTING MIX:**

SOIL WITHIN TREE PIT SHALL CONSIST OF:  
 6 PARTS PREPARED TOPSOIL  
 2 PARTS WELL ROTTED COW OR SHEEP MANURE  
 1 PART PEAT MOSS OR LEAF MOULD MULCH

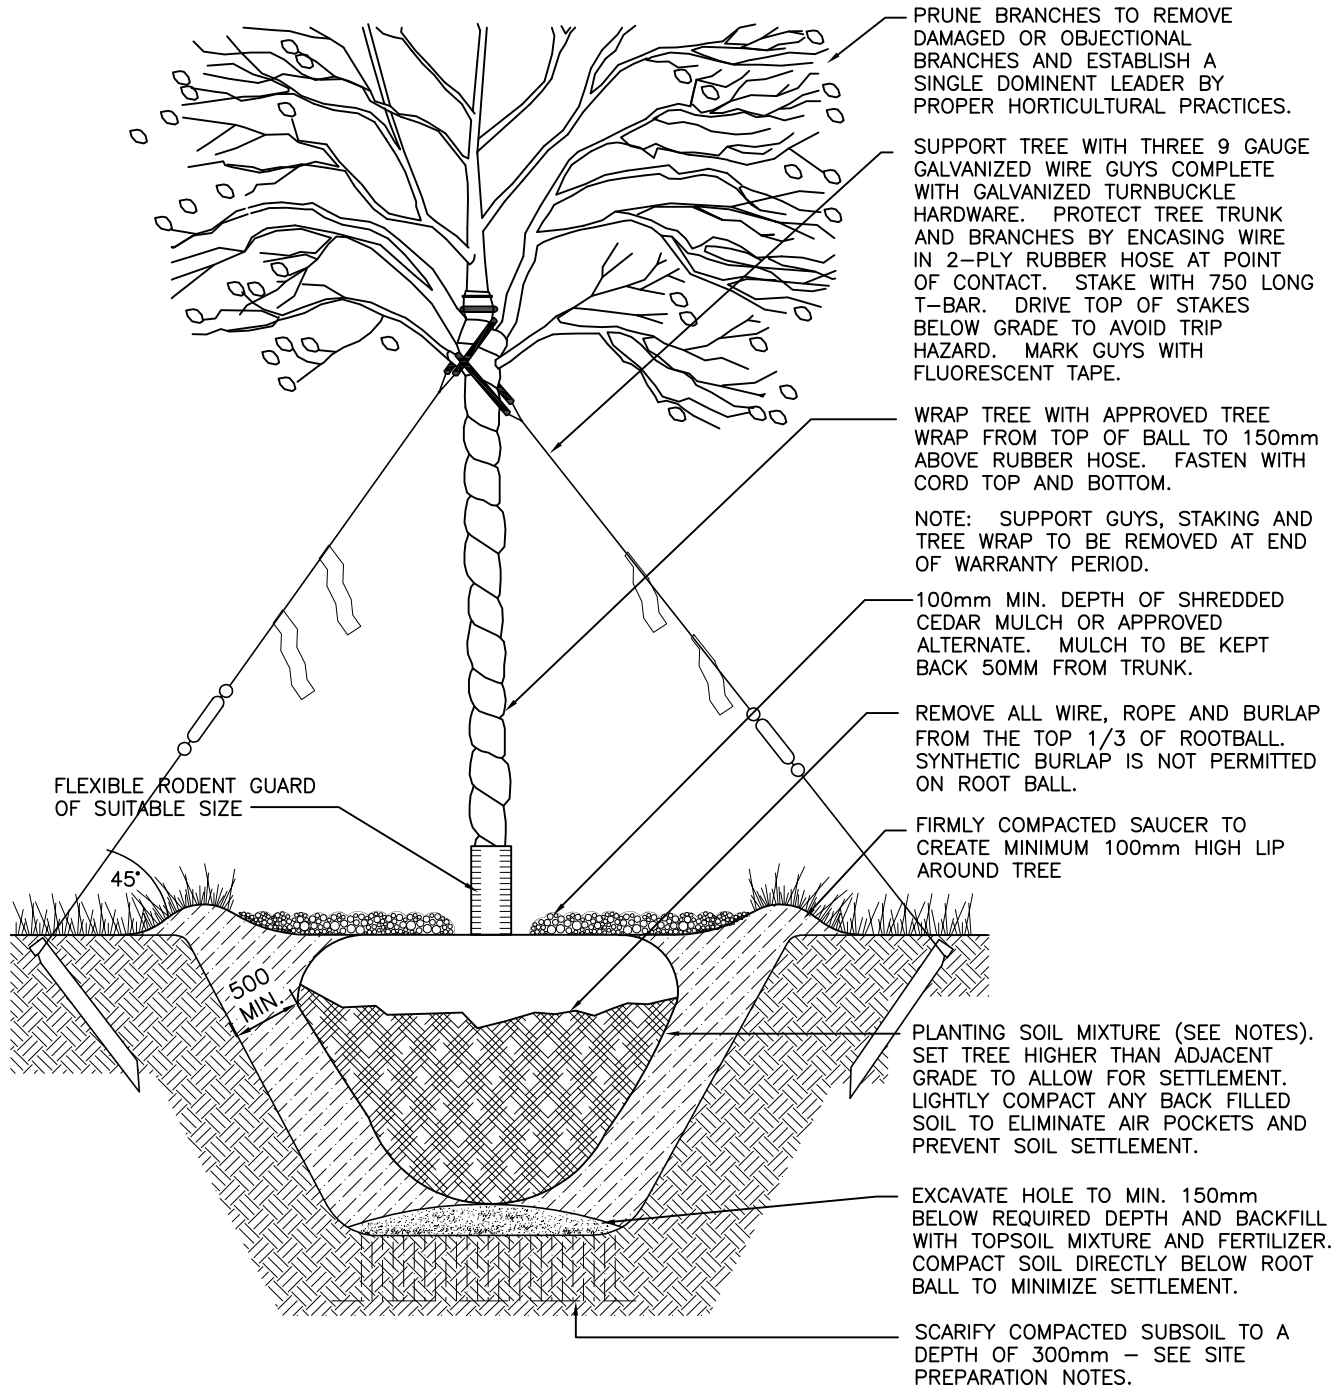

All dimensions are in millimetres unless otherwise noted.

City of Pickering

Engineering Services Department

DRAWN	A. MOSTERT
APPROVED	A. MOSTERT
DATE	AUGUST 2015

<p>DECIDUOUS TREE PLANTING DETAIL</p> <p>70mm CALIPER AND LARGER</p>
--

REVISION NO.	
DATE	
<p>P-1112.3</p>	