

FRAME ELEVATION



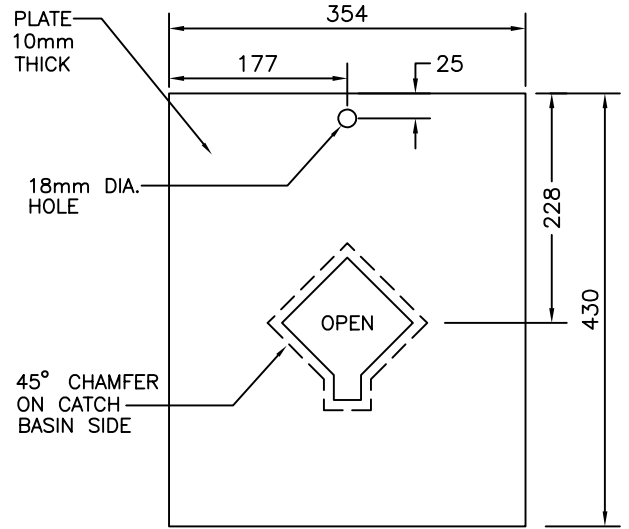



PLATE AND OPENING DETAIL

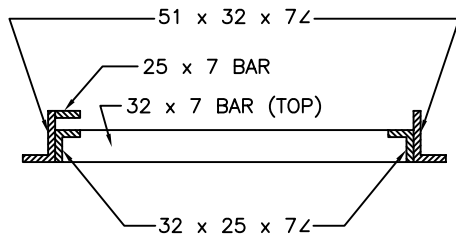

SECTION A-A

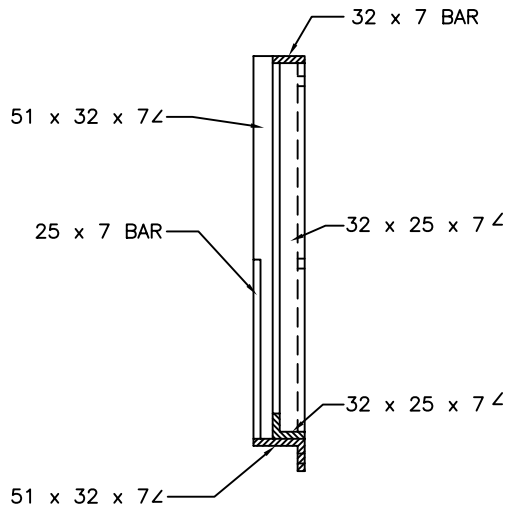

SECTION B-B

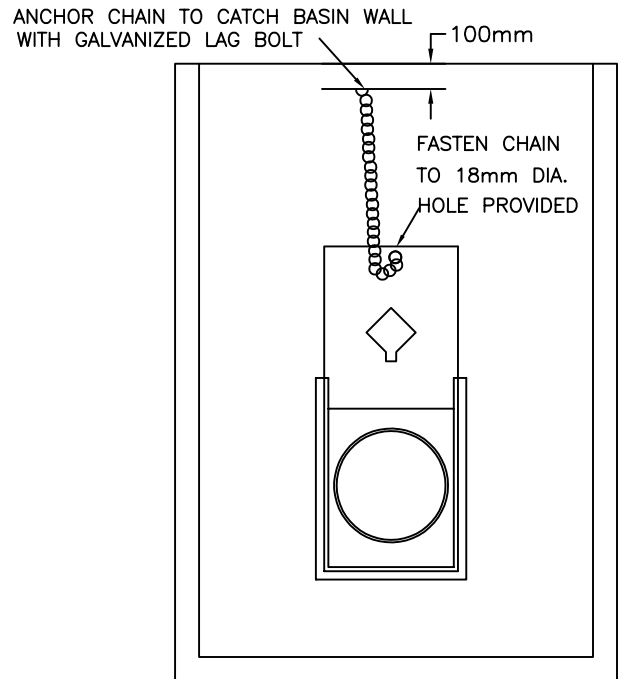

ATTACHING CHAIN DETAIL

ALL HARDWARE TO BE HOT DIPPED GALVANIZED.

NOTES :

1. ALL ANGLES, BARS AND PLATE TO BE P.V.C. MATERIAL.
2. SECURE TO CATCH BASIN WITH 7-10M 50mm LONG HOT DIP GALVANIZED LAG BOLTS AND WASHERS WITH CINCH ANCHORS.
3. ALL SURFACES TO BE SOLVENT WELDED, TO BE TREATED WITH P.V.C. PRIMER PRIOR TO APPLICATION OF P.V.C. SOLVENT WELDING CEMENT.
4. LOCATE IN CATCH BASIN WITH CENTRE OF OPENING AT CENTRE OF OUTLET PIPE.
5. SIZE OF OPENING VARIES WITH FLOW REQUIREMENTS.
6. TO BE USED ONLY WITH THE APPROVAL OF THE DIRECTOR, ENGINEERING SERVICES.

All dimensions are in millimetres unless otherwise noted.

City of Pickering		Engineering Services Department	
DRAWN P. NEUMAN	<b>CATCH BASIN INLET CONTROL DEVICE</b>		REVISION NO. 2
APPROVED S. A. VOKES			DATE NOVEMBER 2019
DATE JANUARY 1993			P-205