


SUPPLY CONTROL CABINET ASSEMBLY 120/240v, 1Ø, 3W

DESCRIPTION	CCT NO.	BKR AMPS	CCT LOAD	CCT LOAD	BKR AMPS	CCT NO.	DESCRIPTION
LIGHTING* (3x180W)	1	30	540W	540W	30	2	LIGHTING* (3x180W)
LIGHTING* (4x180W)	3	30	720W	540W	30	4	LIGHTING* (3x180W)
SPARE	5	30	—	360W	30	6	LIGHTING* (2x180W)
SPARE	7	30	—	180W	30	8	LIGHTING* (1x180W)
TOTAL WATTAGE			2880W		*IN LOAD TABLE LED DRIVER LOSSES ARE INCLUDED		

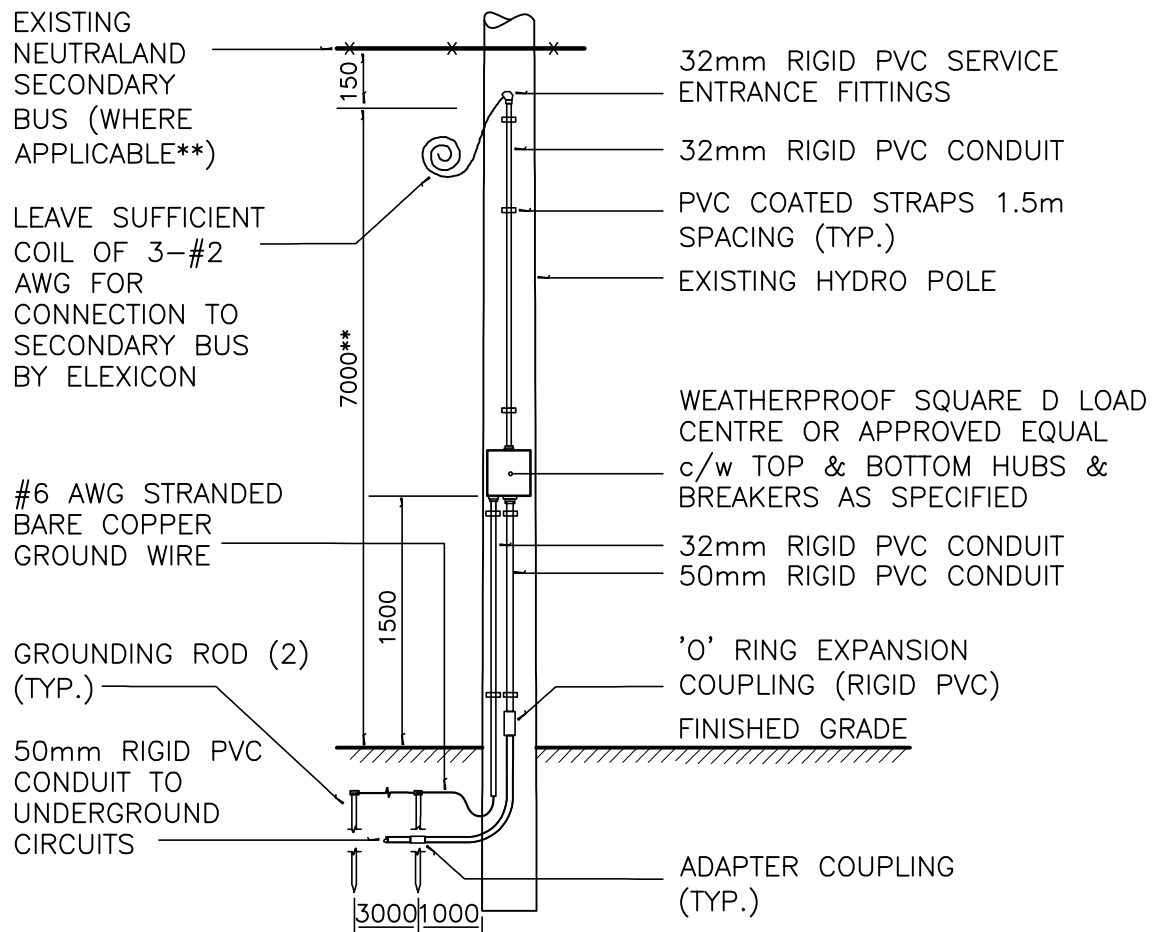

NOTES:

1. CONTRACTOR SHALL CO-ORDINATE INSTALLATION OF PROPOSED POWER SUPPLY ON EXISTING HYDRO POLES WITH ELEXICON ENERGY, GIVING TWO WEEKS ADVANCE NOTICE AND INCORPORATING ANY MINOR CHANGES REQUIRED.
2. FINAL CONNECTION OF INCOMING POWER SUPPLY SHALL BE COMPLETED BY ELEXICON ENERGY.
3. MOUNTING DETAILS TYPICAL ONLY AND MAY BE ADAPTED TO SUIT SITE CONDITIONS AND/OR ELEXICON ENERGY REQUIREMENTS.

City of Pickering

Engineering Services Department

DRAWN	D. POLAK
APPROVED	P. HELGESEN
DATE	DECEMBER 2019

TYPICAL POWER SUPPLY INSTALLATION DETAIL

REVISION NO.
DATE
P-1205