


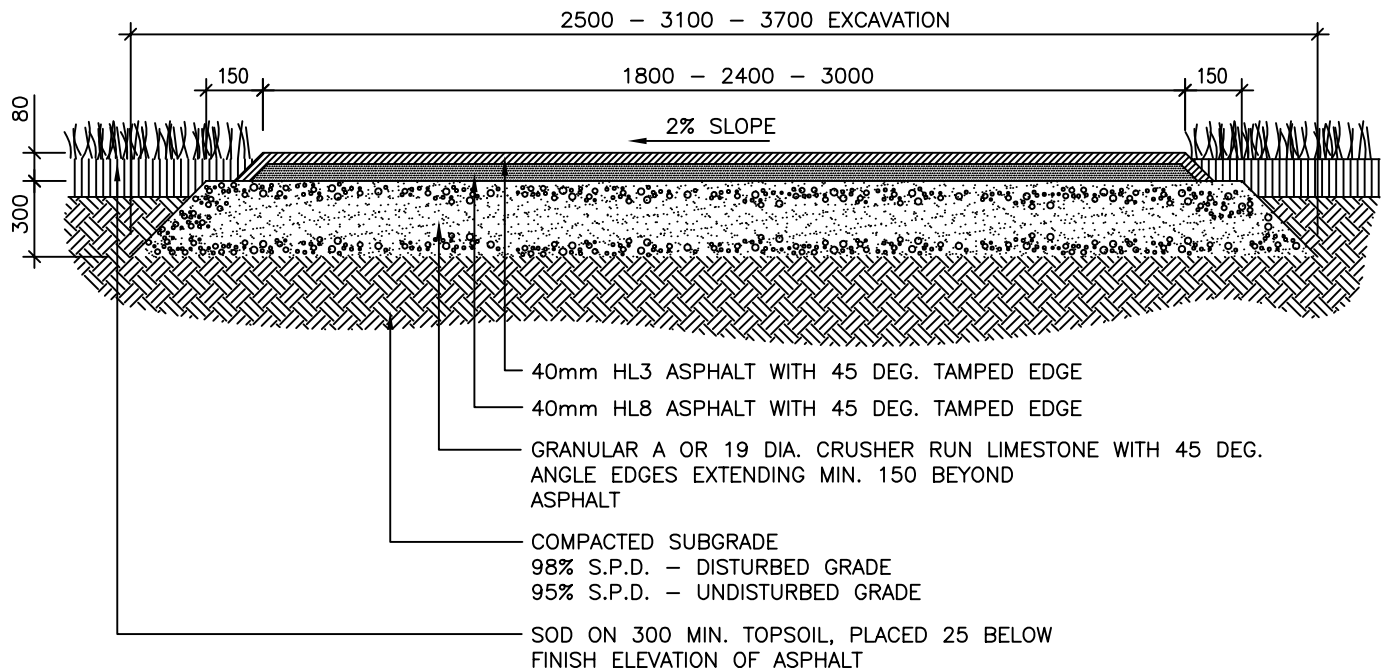

NOTES:

- EXCAVATION: 350 MINIMUM DEPTH, OR AS REQUIRED. CONTRACTOR SHALL CONTACT THE CITY IMMEDIATELY IF UNSUITABLE OR UNSTABLE SUBGRADE IS ENCOUNTERED, SUCH AS EXCESSIVE TOPSOIL, SOFT SPOTS, AND/OR ORGANIC MATTER. METHODS AND/OR MATERIAL MUST BE APPROVED BY THE CITY PRIOR TO COMMENCING WITH WORK. SUBGRADE TO BE CONSOLIDATED AND TESTED TO 98% S.P.D. MIN. REMOVE EXCESS MATERIAL OFF-SITE UNLESS OTHERWISE DIRECTED BY THE CITY.
- GRANULAR BASE: 300 MIN. LAYER OF GRANULAR A OR 19 CRUSHER RUN COMPACTED TO 98% S.P.D. MIN.
- ASPHALT: 80 COMPACTED DEPTH OF HOT MIX HL8/3 ASPHALTIC CONCRETE.
- EDGE TREATMENT: ASPHALT EDGE TO BE 45 DEGREES, TAMPED TO FORM UNIFORMLY, SMOOTH, CLEAN EDGES, WITHOUT LATERAL DEVIATIONS. SOD TO MEET AND MATCH EXISTING GRADES, WITH SMOOTH TRANSITIONS AT A MAXIMUM SLOPE 4:1. ALL SEEDS AND/OR SODDED AREAS SHALL BE 25 BELOW THE FINISH ELEVATION OF ASPHALT.. REMOVE EXCESS TOPSOIL AND SOD AS DIRECTED.
- DRAINAGE: GRADE WALKWAY WITH A 2% SLOPE OR CROWN, OR AS DIRECTED ON SITE. PONDING WATER ON ASPHALT WALKWAYS WILL NOT BE ACCEPTED.
- SODDING: ALL DISTURBED AREAS SHALL BE SODDED (AND/OR SEEDS) OVER 300 TOPSOIL (LIGHTLY COMPACTED), MINIMUM WIDTH OF 900mm. REFER TO PLAN.

All dimensions are in millimetres unless otherwise noted.

City of Pickering		Engineering Services Department	
DRAWN P. HELGESEN	ASPHALT WALKWAY	REVISION NO.	1
APPROVED R. STARR		DATE	NOVEMBER 2019
DATE JUNE 2012		P-612	