


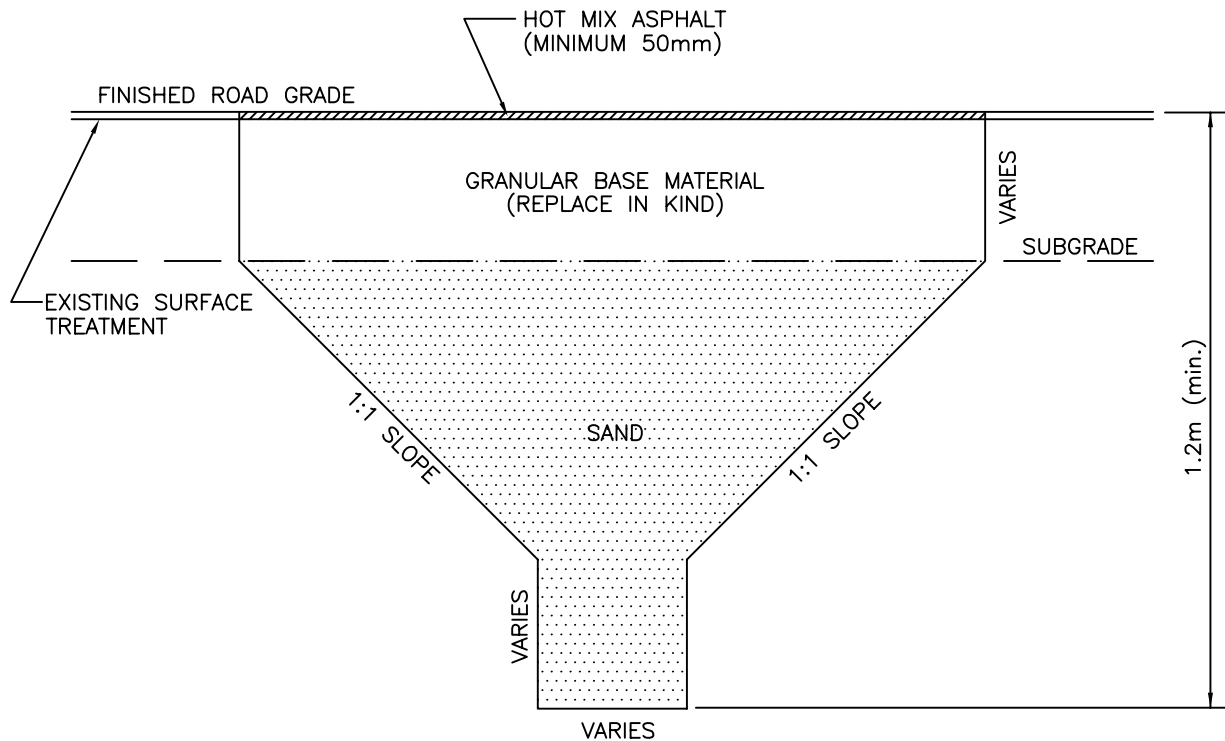

NOTES :

1. SAND TO BE COMPACTED IN 150mm LIFTS TO 95% PROCTOR DENSITY.
2. GRANULAR TO BE COMPACTED TO 100% PROCTOR DENSITY.
3. ASPHALT TO BE COMPACTED TO 97% PROCTOR DENSITY.

FROST TAPER TREATMENT AND
RESTORATION REQUIREMENTS FOR
OPEN CUT ROAD CROSSINGS

All dimensions are in millimetres unless otherwise noted.

City of Pickering		Engineering Services Department	
DRAWN P. NEUMAN	FROST TAPER TREATMENT FOR SURFACE TREATED ROADS	REVISION NO.	1
APPROVED S. A. VOKES		DATE	JULY 2003
DATE JANUARY 1993		P-431	