



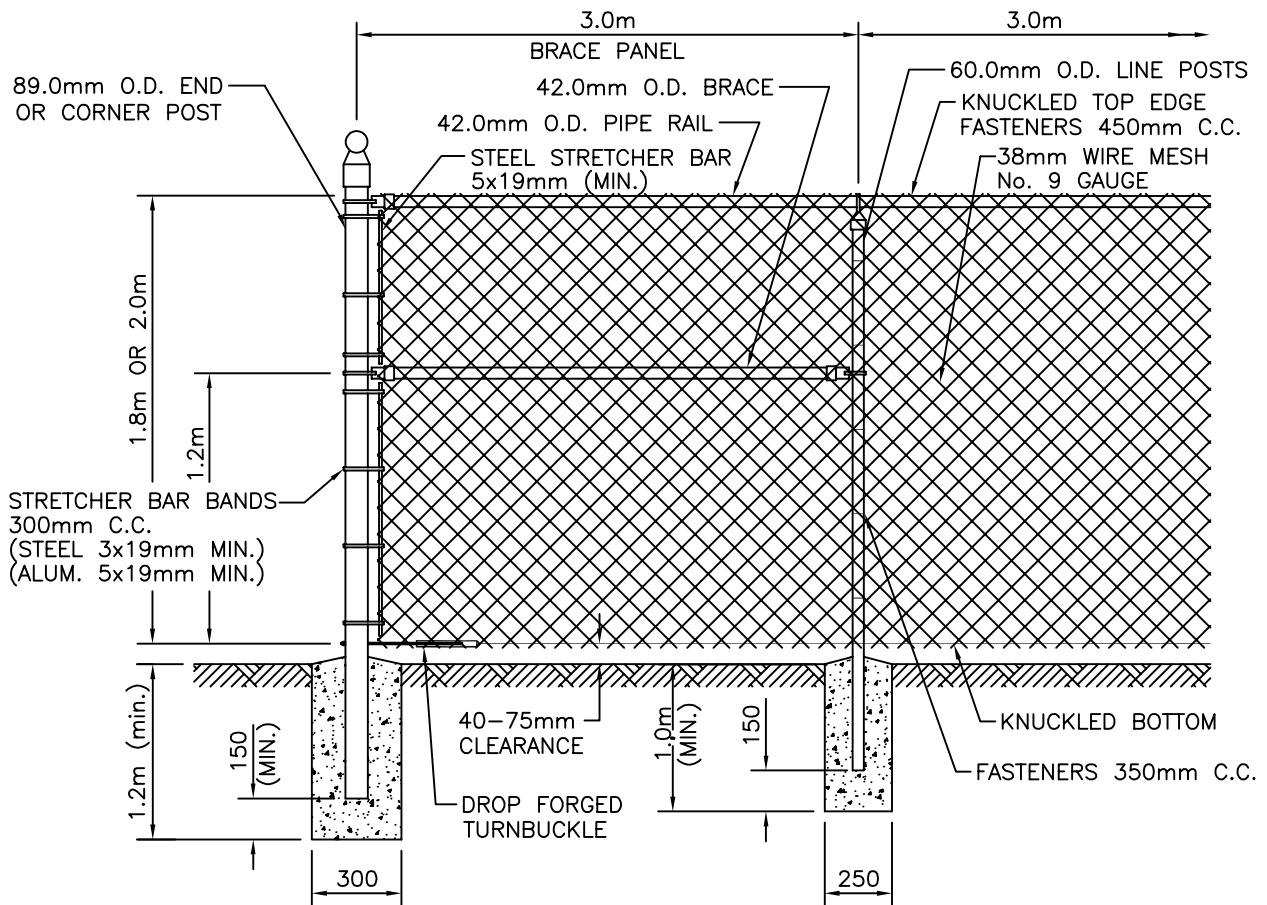

NOTES :

1. END, CORNER AND STRAINING POSTS SHALL BE 3.2m IN LENGTH FOR 2.0m HIGH FENCE, 3.0m IN LENGTH FOR 1.8m HIGH FENCE, 2.7m IN LENGTH FOR 1.5m HIGH FENCE, AND 2.4m IN LENGTH FOR 1.2m HIGH FENCE.(ALL POSTS/PIPE RAILS AND HARDWARE TO BE GALVANIZED)
2. LINE POSTS SHALL BE 3.1m IN LENGTH FOR 2.0m HIGH FENCE, 2.9m IN LENGTH FOR 1.8m HIGH FENCE, 2.6m IN LENGTH FOR 1.5m HIGH FENCE, AND 2.3m IN LENGTH FOR 1.2m HIGH FENCE.
3. WIRE MESH TO BE ON THE PUBLIC SIDE OF THE FENCE WITH THE PIPE RAILS ON THE PRIVATE SIDE.
4. FASTENERS SHALL BE 6 GA. ALUMINUM OR HEAVIER.
5. ALL GALVANIZED POSTS/PIPE RAILS AND HARDWARE TO BE POWDER COATED.
6. ALL CONCRETE STRENGTH TO BE 20MPa.

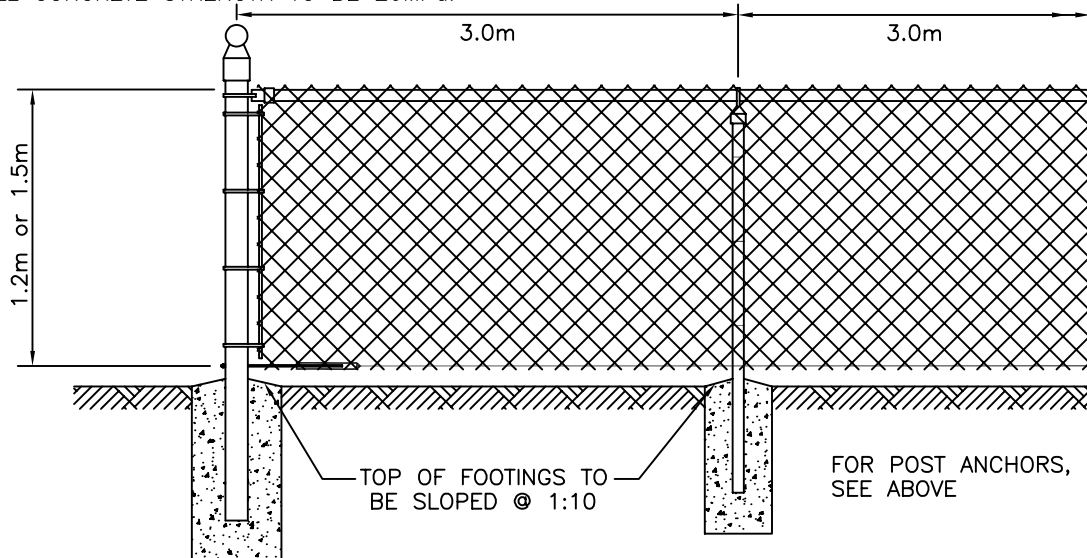

All dimensions are in millimetres unless otherwise noted.

City of Pickering		Engineering Services Department	
DRAWN	J. McMULLEN	REVISION NO. 4	
APPROVED	R. STARR	DATE JUNE 2010	
DATE	JANUARY 1993	P-820	

**BLACK VINYL
CHAIN LINK SECURITY FENCE**