


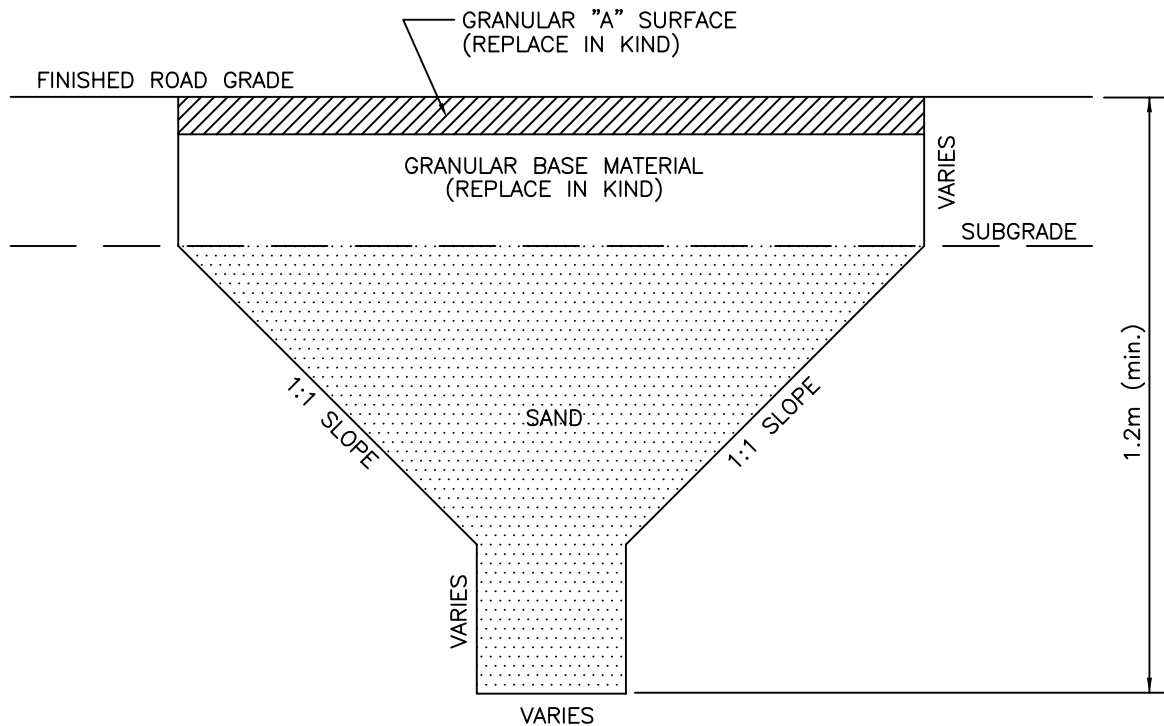

NOTES :

1. SAND TO BE COMPACTED IN 150mm LIFTS TO 95% PROCTOR DENSITY.
2. GRANULAR TO BE COMPACTED TO 100% PROCTOR DENSITY.

FROST TAPER TREATMENT AND
RESTORATION REQUIREMENTS FOR
OPEN CUT ROAD CROSSINGS

All dimensions are in millimetres unless otherwise noted.

City of Pickering		Engineering Services Department	
DRAWN	P. NEUMAN	REVISION NO.	1
APPROVED	S. A. VOKES	DATE	JULY 2003
DATE	JANUARY 1993	P-432	

FROST TAPER TREATMENT FOR
GRAVEL ROADS